

# 60MBLK HOME PV

60-CELL N-TYPE MONOCRYSTALLINE HOME PV



325 Wp

**MAX POWER OUPUT** 

19.51%

**MAX EFFICIENCY** 

10 YEAR

**PRODUCT WARRANTY** 

25 YEAR

LINEAR PERFORMANCE GUARANTEE

HELIENE IS A PREMIER SOLAR MOD-ULE MANUFACTURER, SERVICING THE GROWING SOLAR ENERGY MARKETS OF NORTH AMERICA.

COMBINING PROVEN EUROPEAN TECHNOLOGY WITH NORTH AMERICAN INGENUITY ALLOWS HELIENE TO MAKE A REAL COMMITMENT IN PROVIDING SMARTER ENERGY CHOICES FOR THE FUTURE.

HELIENE

www.heliene.com



HIGHER POWER OUTPUT USING N-TYPE CELLS ALMOST ZERO LID



AVAILABLE IN 1000V OR 1500V SYSTEM VOLTAGE RATING



QUALITY MANAGEMENT SYSTEM FOLLOWING INTERNATIONAL STANDARD: ISO9001




H-BLACK INTEGRATION - BLACK FRAME & BACKSHEET

#### LINEAR PERFORMANCE GUARANTEE

10 YEAR WORKMANSHIP WARRANTY • 25 YEAR LINEAR PERFORMANCE GUARANTEE



#### **DIMENSIONS FOR 60M HOME PV SERIES**

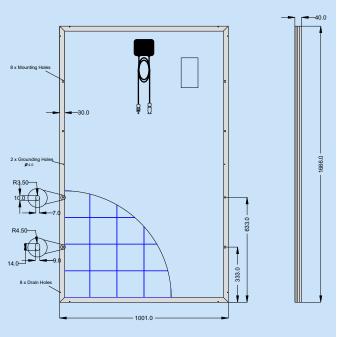


ELECTRICAL DATA (STC)				
Peak Rated Power	P <sub>mpp</sub> (W)	325	320	
Maximum Power Voltage	V <sub>mpp</sub> (V)	34.61	34.17	
Maximum Power Current	I <sub>mpp</sub> (A)	9.41	9.38	
Open Circuit Voltage	V <sub>oc</sub> (V)	40.67	40.09	
Short Circuit Current	Isc (A)	10.13	10.09	
Module Efficiency *	Eff (%)	19.51	19.26	
Maximum Series Fuse Rating	MF (A)	20	20	
Power Output Tolerance	[-2 /+2 %]			

STC - Standard Test Conditions: Irradiation 1000 W/m2 - Air mass AM 1.5 - Cell temperature 25 °C \* Calculated using maximum power based on full positive output tolerance [-2/+2 %]

## MECHANICAL DATA

Dimensions (L x W x D)	1666 x 1001 x 40 mm (65.5 x 39.4 x 1.6 inch)
Weight*	19 kg (41.9 lbs)
Output Cables	1.0 m (39.4 inch) symmetrical cables with MC4 type connectors
Junction Box	IP-67 rated with bypass diodes
Frame	Double webbed 15 micron anodized aluminum alloy
Front Glass	Low-iron content, high-transmission PV solar glass

#### I-V CURVE FOR HELIENE 60M HOEM PVSERIES



#### **CERTIFICATIONS**





## **CERTIFICATIONS**

UL Certification	ULC/ORD-C1703-1, UL1703
IEC Certification	Optional

Heliene modules are certified under the California Energy Commision (CEC) Listing Report

### **TEMPERATURE RATINGS**

Nominal Operating Cell Temperature (NOCT)	+45°C (±2°C)	
Temperature Coefficient of P <sub>max</sub>	-0.38%/°C	
Temperature Coefficient of V <sub>oc</sub>	-0.36%/°C	
Temperature Coefficient of I <sub>sc</sub>	0.07%/°C	

## **MAXIMUM RATINGS**

Operational Temperature	-40°C - +85°C	
Max System Voltage	1000V (*1500V) *Optional	

Warranty

25 Year Linear Power Guarantee

## **PACKAGINGCONFIGURATION**

Modules per box:	26 pieces
Modules per 53' trailer:	936 pieces

HELIENEGOMBLK\_HOME PV\_N\_REV.00



10 Year Manufacturer's Workmanship

(Refer to product warranty page for details)





