

# IGNITE THE POWER OF NATURE

### Polycrystalline Module --small size 55Watt

## Model (SL55TU-18P) Specifications



| Electrical Data                |                |  |
|--------------------------------|----------------|--|
| Maximum Power(W)               | 55W            |  |
| Optimum Power Voltage(Vmp)     | 18.36V         |  |
| Optimum Operating Current(Imp) | 3.00A          |  |
| Open Circuit Voltage(Voc)      | 22.00V         |  |
| Short Circuit Current(Isc)     | 3.21A          |  |
| Cell Efficiency (%)            | 15.86%         |  |
| Module Efficiency (%)          | 12.57%         |  |
| Tolerance Wattage(e.g.+/-3%)   | 0 <b>~+</b> 3% |  |
| NOCT                           | 47°C +/-2°C    |  |

#### **Benefits**

**¤** High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;

¤ Bypass diode minimizes the power drop caused by shade;

<sup>III</sup> Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;

Modules independently tested to ensure conformance with certification and regulatory standards;

Manufacturing facility certified to ISO 9001 quality management system standards.

#### **Applications**

#### **Temperature Coefficients**

¤ On-grid residential roof-tops

Low Carbon Emission

- ¤ On-grid commercial/industrial roof-tops
- Solar power stations
- ¤ Other on-grid applications

| Temperature Coefficients of Isc(%) | +0.04 |
|------------------------------------|-------|
| Temperature Coefficients of Voc(%) | -0.38 |
| Temperature Coefficients of Pm(%)  | -0.47 |
| Temperature Coefficients of Im(%)  | +0.04 |
| Temperature Coefficients of Vm(%)  | -0.38 |
|                                    |       |












# IGNITE THE POWER OF NATURE

## Polycrystalline Module --small size 55Watt

### Components & Mechanical

| Solar Cell                    | 156*63 Poly                     |
|-------------------------------|---------------------------------|
| Number of Cell(pcs)           | 4*9                             |
| Size of Module(mm)            | 655*668*35                      |
| Front Glass Thikness(mm)      | 3.2                             |
| Surface Maximum Load Capacity | 2400-5400Pa                     |
| Allowable Hail Load           | 23m/s ,7.53g                    |
| Weight Per Piece(KG)          | 5.2                             |
| Bypass Diode Rating(A)        | 10                              |
| Frame(Material Corners, etc.) | 35#                             |
| Backing (Brand Type)          | ТРТ                             |
| Temperature Range             | -40°C to +85°C                  |
| FF (%)                        | 70-76%                          |
| Standard Test Conditions      | AM1.5 1000W/m <sup>2</sup> 25°C |

### **Engineering** Drawings

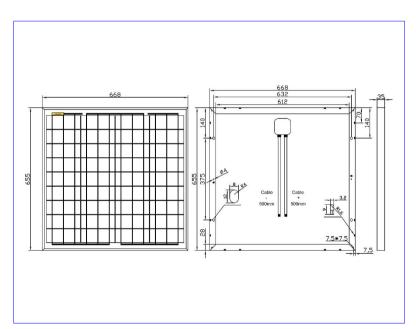

Packing

| Packing    | Wooden Box    |
|------------|---------------|
| Pieces per | 60pcs/Pallets |
| container  |               |

#### **Project Picture**



©2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.



Ningbo Qixin Solar Electrical Appliance Co., Ltd ADD: No. 37 Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China TEL: 0086 (0)574 25758821 FAX: 0086 (0)574 25758820 E-mail: info@nbqxsolar.com

