

Multi

72cells

(320~350Watt)



Those who dream of a better future can help lead to a more meaningful and enriched world. As a leading solar module manufacturer in Korea, we never stop to achieve competitiveness through differentiation, implement the maximum value, and commit to sustainable development with customers.

Certificates



Quality

ISO 9001:2015 ISO 14001:2015
OHSAS 18001:2007 ISO/TS 16949:2009
Bankability Tier1 PV module manufacturer



Product

IEC 61215 / IEC 61730 : TUV / CE
IEC 61701 Salt Mist Corrosion Level 6(Optional)
UL 1703 Fire Rating Type1
Assembled in Korea

Key Features



Linear Performance Warranty

12 Years product warranty
25 Years linear performance warranty



1,500V

Designed for UL and IEC 1,500V
Saving BoS costs



Certified Durability

5,400 Pa snow load
2,400 Pa wind load



PID Free(Optional)

Anti-PID Cell
Anti-PID encapsulation technology

Optional Features



Perfect Black

Black anodized frame
Black back sheet
Black string ribbon



Floating PV Installation

Module backside blocks moisture permeability

Multi- Crystalline Solar Module (PD-AN1)

72cells (320~350 Watt)

Electrical Data / STC (PD-AN1) : Irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25 °C

Nominal Max Power	Pmax(Wp)	320	325	330	335	340	345	350
Voltage at Pmax	Vmp(V)	36.6	37.0	37.4	37.8	38.2	38.6	39.0
Current at Pmax	Imp(A)	8.75	8.79	8.83	8.87	8.91	8.94	8.98
Open Circuit Voltage	Voc(V) ±3%	45.3	45.7	46.1	46.5	46.9	47.3	47.7
Short Circuit Current	Isc(A) ±3%	9.12	9.16	9.20	9.24	9.28	9.31	9.35
Module Efficiency	%	16.05%	16.30%	16.55%	16.80%	17.05%	17.30%	17.55%
Operating Temperature		-40°C ~ +85°C						
Max. System Voltage		1500 Vdc						
Max. Series Fuse Rating		20A						
Max. Reverse Current		20A						
Power tolerance		0 ~ +4.99W						

Electrical Data / NOCT (PD-AN1) : Irradiance of 800W/m², spectrum AM 1.5 and Ambient Temperature 20°C, wind speed 1m/s

Nominal Max Power	Pmax(Wp)	233.6	237.2	240.4	244.0	247.7	251.0	254.7
Voltage at Pmax	Vmp(V)	33.7	34.0	34.3	34.7	35.0	35.3	35.7
Current at Pmax	Imp(A)	6.94	6.98	7.01	7.04	7.08	7.10	7.14
Open Circuit Voltage	Voc(V)	41.2	41.5	41.9	42.2	42.6	43.0	43.3
Short Circuit Current	Isc(A)	7.39	7.42	7.45	7.49	7.52	7.54	7.57

Mechanical Data

Cell Type	Multi-crystalline, 6 inch	
Cell Arrangement	72 (6 x 12)	
Dimensions	1994*1000*35mm (78.50*39.37*1.38in)	1994*1000*40mm (78.50*39.37*1.57in)
Weight	21.5kg(47.4 lbs)	22.5kg (49.6 lbs)
Stand. Packaging	29 pcs	26 pcs
Module Pieces per Container	638 pcs	572 pcs
Pallets per Container	22	
Frame	Anodized aluminum	
Front Glass	3.2mm(0.13in) tempered glass	
J-Box	IP68, 3 diodes	
Output Cable	(+)1200mm(47.24in), (-)1200mm(47.24in), 12AWG	
Connectors	QC4.10-35	
Module Fire Performance	Type 1	


Warranties

Product	12 years
Performance	25 years linear power warranty (>82.2%)


Temperature Characteristics

Specifications	Data
Temperature coefficient (Pmax)	-0.45
Temperature coefficient (Voc)	-0.34
Temperature coefficient (Isc)	0.06
Normal Operating Cell Temperature	46.0 ± 2°C

MODULE DIAGRAM unit : mm(inch)

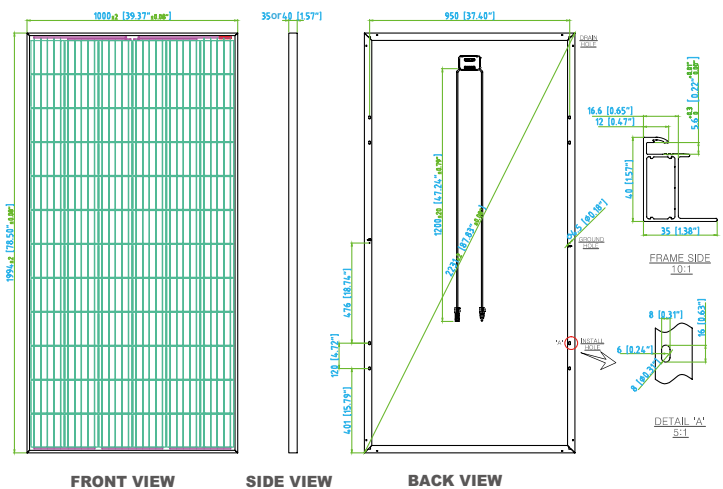

I-V Curve according to Irradiance

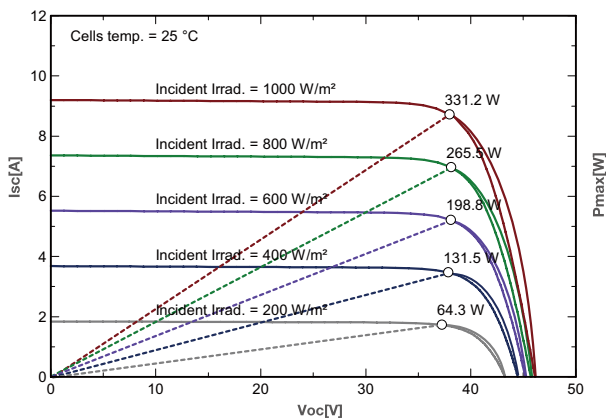

Hansol
http://solar.hansoltechnics.com

140, Gwahaksanup 1-ro, Oksan-myeon, Heungdeok-gu,
Cheongju-si, Chungcheongbuk-do 28122, Korea
Tel : +82-43-219-3462, US Office : +1-213-793-3688, Fax : +82-43-219-3410
E-mail : solar@hansol.com

