

IGNITE THE POWER OF NATURE

Monocrystalline Modue --small size 5Watt

Model (SL5TU-18MD) Specifications



Electrical Data		
Maximum Power(W)	5W	
Optimum Power Voltage(Vmp)	18.57V	
Optimum Operating Current(Imp)	0.27A	
Open Circuit Voltage(Voc)	22.64V	
Short Circuit Current(Isc)	0.29A	
Cell Efficiency (%)	17.96%	
Module Efficiency (%)	9.16%	
Tolerance Wattage(e.g.+/-3%)	0 ~+3%	
NOCT	47°C +/-2°C	

Benefits

- □ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- Bypass diode minimizes the power drop caused by shade;
- Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001 quality management system standards.







Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

Temperature Coefficients

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.38
Temperature Coefficients of Pm(%)	-0.47
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.38






IGNITE THE POWER OF NATURE

Monocrystalline Modue --small size 5Watt

Components & Mechanical

Solar Cell	52*15.3(16.8) Mono
Number of Cell(pcs)	4*9
Size of Module(mm)	260*210*18
Front Glass Thikness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	0.7
Frame(Material Corners,etc.)	18#
Backing (Brand Type)	TPT
Temperature Range	-40°C to +85°C
FF (%)	70-76%
Standard Test Conditions	AM1.5 1000W/m² 25°C

Engineering Drawings

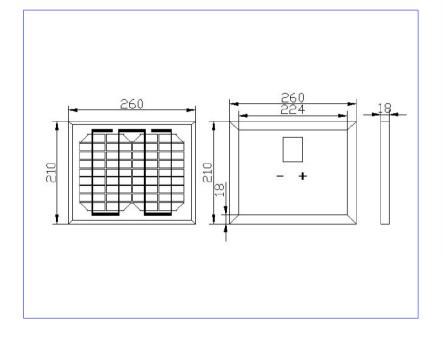

© 2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.









Packing

Packing	Wooden Box
Pieces per	200pcs/Pallets
container	ZUUPUS/ Fallets

Project Picture



Ningbo Qixin Solar Electrical Appliance Co., Ltd

ADD: No. 37 Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China

TEL: 0086 (0)574 25758821 FAX: 0086 (0)574 25758820 E-mail: info@nbqxsolar.com

