

# IGNITE THE POWER OF NATURE

## Polycrystalline Module --small size 105Watt

# Model (SL105TU-18P) Specifications





Low Carbon Emission Excellent Weather

Electrical Data		
Maximum Power(W)	105W	
Optimum Power Voltage(Vmp)	18.50V	
Optimum Operating Current(Imp)	5.68A	
Open Circuit Voltage(Voc)	22.14V	
Short Circuit Current(Isc)	6.07A	
Cell Efficiency (%)	16.30%	
Module Efficiency (%)	14.03%	
Tolerance Wattage(e.g.+/-3%)	0 ~+3%	
NOCT	47°C +/-2°C	

### **Benefits**

**¤** High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;

Bypass diode minimizes the power drop caused by shade;

**¤** Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;

Modules independently tested to ensure conformance with certification and regulatory standards;

Manufacturing facility certified to ISO 9001 quality management system standards.

### **Applications**

### **Temperature Coefficients**

- On-grid residential roof-tops
- ¤ On-grid commercial/industrial roof-tops
- Solar power stations
- ¤ Other on-grid applications

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.38
Temperature Coefficients of Pm(%)	-0.47
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.38








# IGNITE THE POWER OF NATURE

# Polycrystalline Module --small size 105Watt

## Components & Mechanical

Solar Cell	156*117 Poly
Number of Cell(pcs)	4*9
Size of Module(mm)	1120*668*35
Front Glass Thikness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	8.9
Bypass Diode Rating(A)	10
Frame(Material Corners, etc.)	35#
Backing (Brand Type)	ТРТ
Temperature Range	-40°C to +85°C
FF (%)	70-76%
Standard Test Conditions	AM1.5 1000W/m <sup>2</sup> 25°C

## **Engineering** Drawings

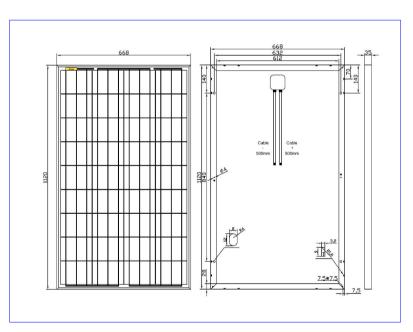

## Packing

Packing	Wooden Box
Pieces per	30pcs/Pallets
container	Sopes/Fallels

#### **Project Picture**



©013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.



Ningbo Qixin Solar Electrical Appliance Co., Ltd ADD: No. 37 Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China TEL: 0086 (0)574 25758821 FAX: 0086 (0)574 25758820 E-mail: info@nbqxsolar.com

2

