



IGNITE THE POWER OF NATURE

Polycrystalline Module

--small size 35Watt

Model (SL35TU-18P) Specifications



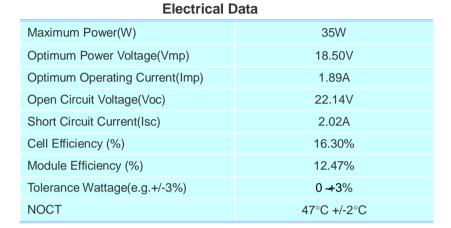

Benefits

- # High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- Bypass diode minimizes the power drop caused by shade;
- Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- math Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001 quality management system standards.











Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

Temperature Coefficients

Temperature Coefficients of Isc(%)	+0.04	
Temperature Coefficients of Voc(%)	-0.38	
Temperature Coefficients of Pm(%)	-0.47	
Temperature Coefficients of Im(%)	+0.04	
Temperature Coefficients of Vm(%)	-0.38	






IGNITE THE POWER OF NATURE

Polycrystalline Module --small size 35Watt

Components & Mechanical

Solar Cell	156*39 Poly
Number of Cell(pcs)	3*12
Size of Module(mm)	545*515*28
Front Glass Thikness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	3.4
Frame(Material Corners,etc.)	28#
Backing (Brand Type)	TPT
Temperature Range	-40°C to +85°C
FF (%)	70-76%
Standard Test Conditions	AM1.5 1000W/m² 25°C

Engineering Drawings

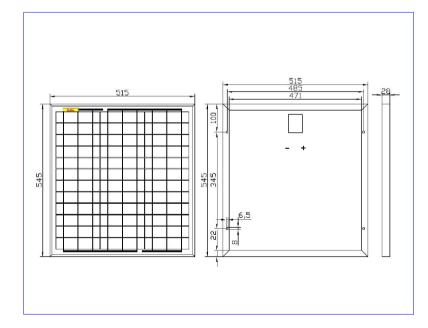

© 2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.









Packing

Packing	Wooden Box
Pieces per	100pcs/Pallets
container	

Project Picture



Ningbo Qixin Solar Electrical Appliance Co., Ltd

ADD: No. 37 Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China

TEL: 0086 (0)574 25758821 FAX: 0086 (0)574 25758820 E-mail: info@nbqxsokr.com

