


# **IGNITE THE POWER OF NATURE**

# Polycrystalline Module --small size 110Watt

# **Model (SL110TU-24SP) Specifications**

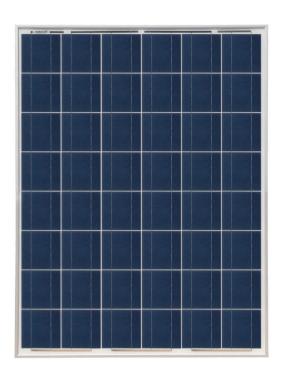

Electrical Data			
Maximum Power(W)	110W		
Optimum Power Voltage(Vmp)	23.90V		
Optimum Operating Current(Imp)	4.60A		
Open Circuit Voltage(Voc)	29.18V		
Short Circuit Current(Isc)	4.92A		
Cell Efficiency (%)	14.96%		
Module Efficiency (%)	12.78%		
Tolerance Wattage(e.g.+/-3%)	0~+3%		
NOCT	47°C +/-2°C		

## **Benefits**

- ☐ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- \(\simega\) Bypass diode minimizes the power drop caused by shade;
- Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- Modules independently tested to ensure conformance with certification and regulatory standards;
- Manufacturing facility certified to ISO 9001 quality management system standards.







Modules sorted by current, optimizing system power High Efficiency

ncy





**Applications** 

- ○On-grid residential roof-tops
- COn-grid commercial/industrial roof-tops
- Solar power stations
- ○Other on-grid applications

#### **Temperature Coefficients**

Temperature Coefficients of Isc(%)℃	+0.04
Temperature Coefficients of Voc(%) <sup>°</sup> C	-0.38
Temperature Coefficients of Pm(%)℃	-0.47
Temperature Coefficients of Im(%)°C	+0.04
Temperature Coefficients of Vm(%) $^{\circ}\!$	-0.38






# **IGNITE THE POWER OF NATURE**

# Polycrystalline Module --small size 110Watt

## **Components & Mechanical**

Solar Cell	125*125 Poly	
Number of Cell(pcs)	6*8	
Size of Module(mm)	1065*808*35	
Front Glass Thikness(mm)	3.2	
Surface Maximum Load Capacity	2400-5400Pa	
Allowable Hail Load	23m/s ,7.53g	
Weight Per Piece(KG)	13.0	
Bypass Diode Rating(A)	10	
Frame(Material Corners,etc.)	35#	
Backing (Brand Type)	TPT	
Temperature Range	-40°C to +85°C	
FF (%)	70-76%	
Standard Test Conditions	AM1.5 1000W/m² 25°C	

## **Engineering Drawings**

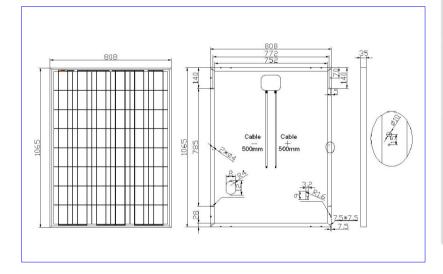

© 2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.











### Warranty

Warranty	25 years limited power warranty
	10 years limited product warranty

### **Packing**

Packing	Wooden Box
Pieces per	30pcs/Pallets
container	

#### **Proiect Picture**



#### Ningbo Qixin Solar Electrical Appliance Co., Ltd

ADD: No. 37 Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China

TEL: 0086 (0)574 25758821 FAX: 0086 (0)574 25758820 E-mail: info@nbqxsolar.com

