

DIAMOND™

Crystalline PV Module

ASM6610P Series

- ▶ Extended 30-year performance warranty & 12-year product warranty
- ▶ Up to PID free 1000h ability (@85°C/85%, -1000V)
- ▶ Achieve to snail trail free with optimized module process
- ▶ Applicable for the extremely stringent environment

250 255 260 265 270 275

EN

ELECTRICAL SPECIFICATIONS ¹

STC ² rated output (P _{max})	250 Wp	255 Wp	260 Wp	265 Wp	270 Wp	275 Wp
Standard sorted output	-0/+3%					
Warranted power output STC (P _{mpp min})	250 Wp	255 Wp	260 Wp	265 Wp	270 Wp	275 Wp
Rated voltage (V _{mpp}) at STC	30.29 V	30.54 V	30.79 V	31.04 V	31.29 V	31.54 V
Rated current (I _{mpp}) at STC	8.33 A	8.42 A	8.52 A	8.61 A	8.70 A	8.80 A
Open circuit voltage (V _{oc}) at STC	36.91 V	37.18 V	37.45 V	37.72 V	37.99 V	38.26 V
Short circuit current (I _{sc}) at STC	8.80 A	8.89 A	8.98 A	9.06 A	9.15 A	9.23 A
Module efficiency	15.3%	15.6%	15.9%	16.2%	16.5%	16.8%
Rated output (P _{mpp}) at NOCT ³	186.5 Wp	190.2 Wp	193.9 Wp	197.6 Wp	201.4 Wp	205.2 Wp
Rated voltage (V _{mpp}) at NOCT	27.70 V	27.93 V	28.16 V	28.39 V	28.61 V	28.84 V
Rated current (I _{mpp}) at NOCT	6.73 A	6.81 A	6.89 A	6.96 A	7.04 A	7.11 A
Open circuit voltage (V _{oc}) at NOCT	33.97 V	34.22 V	34.47 V	34.72 V	34.96 V	35.21 V
Short circuit current (I _{sc}) at NOCT	7.11 A	7.18 A	7.25 A	7.32 A	7.39 A	7.45 A

Temperature coefficient (P _{mpp})	- 0.42% / K	Maximum system voltage	1000 V _{dc}
Temperature coefficient (I _{sc})	+0.044% / K	Number of diodes	3
Temperature coefficient (V _{oc})	- 0.32% / K	Reverse current loadability (I _r)	20 A
Normal operating cell temperature (NOCT)	46°C ±2°C	Maximum series fuse rating	15 A

¹ Measuring uncertainty P_{mpp}: +/-3 %; Tolerance for V_{oc}, I_{sc}, V_{mpp} and I_{mpp}: +/-10 %

² Standard test conditions that are defined as follows:

1.000 W/m² irradiation at a spectral density of AM 1.5 and a cell temperature of 25°C,

³ Nominal operating temperature of the cell at 800 W/m² irradiation, 20°C ambient temperature, wind speed of 1 m/s

⁴ Manufactured in an ISO9001/14001/50001 certified facility



RELATED PARAMETERS


Cell type	Polycrystalline cell, 4-busbar technology
Number of cells / cell arrangement	60 / 6 x 10
Cells dimension	156 x 156 mm ²

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H) ⁵	1654 x 989 x 40 mm
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Weight (module only)	18.2 kg
Front glass thickness	3.2 mm
Junction box IP rating	IP 67
Cable length	1000 mm
Cable diameter	4 mm ²
Maximum load capacity ⁶	6000 Pa
Fire class (IEC 61730)	C
Connector type	MC4 pluggable

QUALIFICATION AND LINEAR WARRANTIES

Product standard	IEC 61215 Ed. 2, IEC 61730
Extended product warranty ⁷	12 years
Performance warranty ⁷	Linear performance warranty
Year 1	>97.5 % of warranted output power
Year 30	>83 % of warranted output power

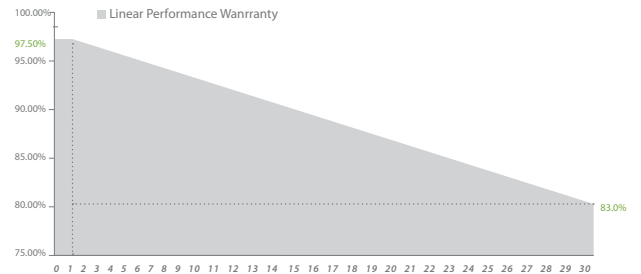

MODULE DIMENSION DETAILS

Front view	Side view	Rear view	Frame cross section

⁵ Dimensional tolerance: +/-2 mm

⁶ In accordance with IEC 61215 Ed. 2

⁷ According to the current warranty conditions of Astronergy Solarmodule GmbH

© Astronergy Solarmodule GmbH
 Specifications and designs included in this datasheet are subject to change without notice.
 All rights reserved.