

IGNITE THE POWER OF NATURE

Polycrystalline Module --small size 45Watt

Model (SL45TU-18P) Specifications



| Electrical Data | | | |
|--------------------------------|--------------------|--|--|
| Maximum Power(W) | 45W | | |
| Optimum Power Voltage(Vmp) | 18.36V | | |
| Optimum Operating Current(Imp) | 2.45A | | |
| Open Circuit Voltage(Voc) | 22.00V | | |
| Short Circuit Current(Isc) | 2.62A | | |
| Cell Efficiency (%) | 15.72% | | |
| Module Efficiency (%) | 12.36% | | |
| Tolerance Wattage(e.g.+/-3%) | 0 ~+ 3% | | |
| NOCT | 47°C +/-2°C | | |

Benefits

¤ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;

^a Bypass diode minimizes the power drop caused by shade;

^{III} Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;

Modules independently tested to ensure conformance with certification and regulatory standards;


Manufacturing facility certified to ISO 9001 quality management system standards.

Applications

Temperature Coefficients

- ¤ On-grid residential roof-tops
- ¤ On-grid commercial/industrial roof-tops
- Solar power stations
- ¤ Other on-grid applications

| Temperature Coefficients of Isc(%) | +0.04 |
|--|----------------|
| Temperature Coefficients of Voc(%) | -0.38 |
| Temperature Coefficients of Pm(%) | -0.47 |
| Temperature Coefficients of Im(%) | +0.04 |
| Temperature Coefficients of Vm(%) | -0.38 |
| Temperature Coefficients of Pm(%) Temperature Coefficients of Im(%) | -0.47 +0.04 |



Low Carbon Emission Excellent V Resistance






IGNITE THE POWER OF NATURE

Polycrystalline Module --small size 45Watt

Components & Mechanical

| Solar Cell | 156*52 Poly |
|-------------------------------|---------------------------------|
| Number of Cell(pcs) | 4*9 |
| Size of Module(mm) | 668*545*28 |
| Front Glass Thikness(mm) | 3.2 |
| Surface Maximum Load Capacity | 2400-5400Pa |
| Allowable Hail Load | 23m/s ,7.53g |
| Weight Per Piece(KG) | 4.3 |
| Bypass Diode Rating(A) | 10 |
| Frame(Material Corners, etc.) | 28# |
| Backing (Brand Type) | ТРТ |
| Temperature Range | -40°C to +85°C |
| FF (%) | 70-76% |
| Standard Test Conditions | AM1.5 1000W/m ² 25°C |

Engineering Drawings

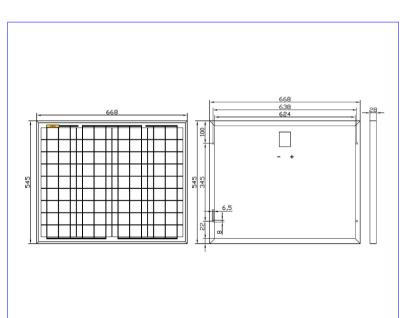

Packing

| Packing | Wooden Box |
|------------|---------------|
| Pieces per | 60pcs/Pallets |
| container | |

Project Picture



Ningbo Qixin Solar Electrical Appliance Co., Ltd

ADD: No. 37 Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China TEL: 0086 (0)574 25758821 FAX: 0086 (0)574 25758820 E-mail: info@nbqxsolar.com

©2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

