

D6M350E4A 350W
D6M355E4A 355W
D6M360E4A 360W
Mono-Crystalline Photovoltaic Module



Positive power tolerance
 0~+4.99 watt



Withstand strong snow load 5400 Pa / wind load 2400



Excellent low light performance
 3.5% relative eff. reduction at low-irradiance (200W/m²)



100% EL inline inspection
 Better module reliability



Ammonia resistance
 According to IEC 62716 Ed. 1



www.tuv.com
 ID 0000038214



Certificate Number MCS PV0203 Technology



Reliability & Certification

Product guarantee: 10-year

Linear Performance Warranty


- 1-year: 97% power output
 then power degradation 0.7% per year till 25th year

- 25-year: 80.2% power output

- 10-year: 90.7% power output

IEC 61215 / IEC 61730, CE, MCS, UL1703, CEC

* Please refer to NSP product warranty for details

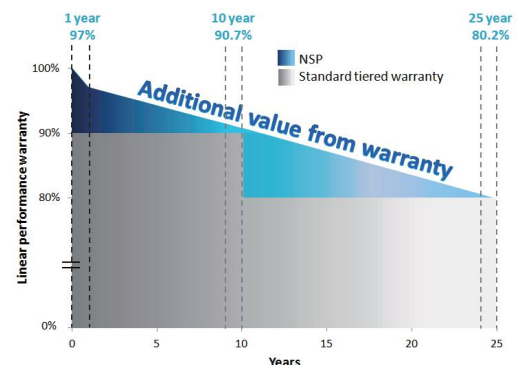

For more information, please visit us at www.nsp.com



NEO SOLAR POWER

Electrical Data

MODEL	D6M 350 E4A	D6M 355 E4A	D6M 360 E4A
Maximum Rating Power (Pmax)	350 W	355 W	360 W
Module Efficiency	18.0%	18.3%	18.6%
Open Circuit Voltage (Voc)	46.89 V	47.16 V	47.44 V
Maximum Power Voltage (Vmpp)	38.34 V	38.63 V	39.01 V
Short Circuit Current (Isc)	9.54 A	9.70 A	9.77 A
Maximum Power Current (Imp)	9.13 A	9.19 A	9.23 A

*Electrical data under Standard Test Conditions (STC): Cell Temperature of 25 °C, Irradiance 1000 W/m², AM 1.5

*Values w/o tolerance are typical numbers

*Specifications subject to change

Mechanical Data

Item	Specification
Dimension	1956mm (L) ¹ x 992 mm (W) ¹ x 35 mm (D) ² / 77" (L) ¹ x 39.1" (W) ¹ x 1.38" (D) ²
Weight	23 kg / 50.7 lbs
Solar Cell	72 monocrystalline 6" silicon cells
Front Glass	Anti-reflective tempered solar glass, 3.2 mm thickness
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Junction Box	IP 67 rated
Frame	Anodized aluminum frame, original or black
Package Configuration	30 pcs per pallet, 660 modules per 40' HQ container

¹ : With assembly tolerance of ± 2 mm [± 0.08"]
² : With assembly tolerance of ± 0.8 mm [± 0.03"]

Operating Conditions

Item	Specification
Mechanical Load	5400 Pa (Certified by TÜV Rheinland)
Maximum System Voltage	DC 1000V
Series Fuse Rating	15 A
Operating Temperature	-40 to 85 °C

Temperature Characteristics


Item	Specification
Nominal Operating Cell Temperature	44 °C ± 2°C
Temperature Coefficient of Isc	0.042 % / °C
Temperature Coefficient of Voc	-0.318 % / °C
Temperature Coefficient of Pmax	-0.427 % / °C

* Nominal Operating Cell Temperature (NOCT): Irradiance 800W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s


* Please refer to NSP's Standard Module Installation Manual before using the product

* Reduction in efficiency from 1000 W/m² to 200 W/m² at 25 °C: 3.5% ± 2 %


Front View & Back View

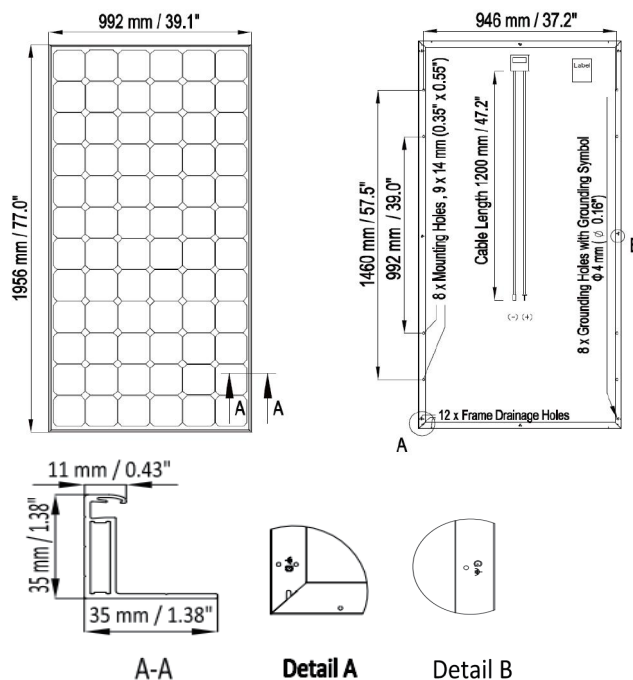

Dependence on Temperature

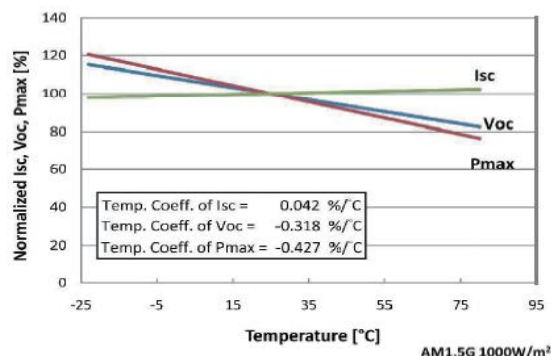

Dependence on Irradiance

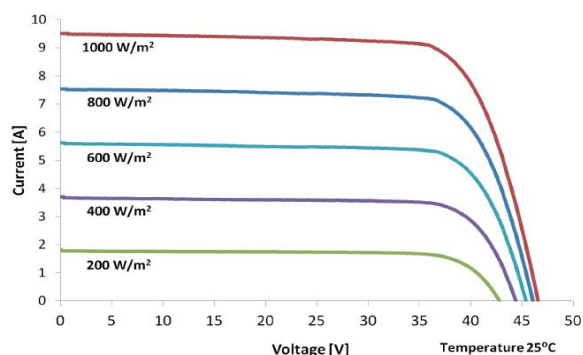

Contact Us



For sales, contact Mitsubishi Electric US, Inc.

5900-A Katella Avenue
Cypress, CA 90630

Ph: 714-236-6137
Email: pv@meus.mea.com
www.MitsubishiElectricSolar.com

Neo Solar Power Corporation

Headquarters: 7, Li-Hsin 3rd Rd., Hsinchu Science Park, Hsinchu, 30078, Taiwan