

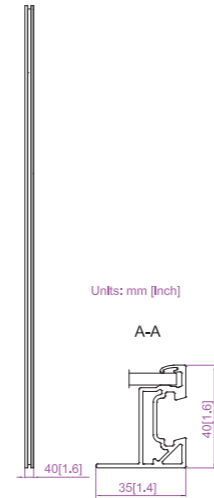


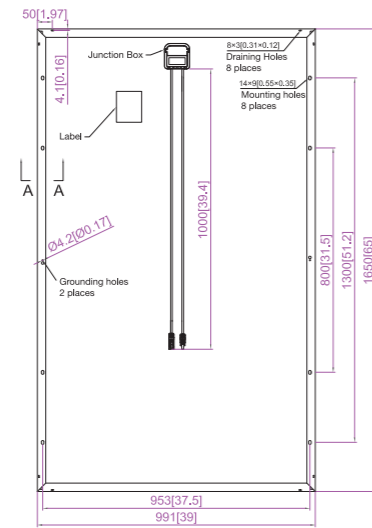

Engineering Drawings

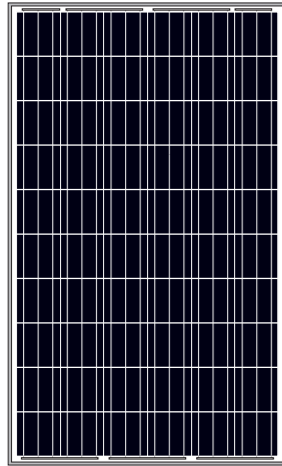

MECHANICAL PARAMETERS

Cell (mm)	Poly 156x156
Weight (kg)	19.2 (approx)
Dimensions (L×W×H) (mm)	1650×991×40
Cable Cross Section Size	4
No. of Cells and Connections	60 (6×10)
Junction Box	IP67, 3 diodes
Connector	MC4 Compatible
Packaging Configuration	26 Per Pallet




WORKING CONDITIONS

Maximum System Voltage	DC 1000V (IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	15A
Maximum Static Load, Front	5400Pa (112 lb/ft ²)
Maximum Static Load, Back	2400Pa (50 lb/ft ²)
NOCT	45±2°C
Application Class	Class A

ELECTRICAL PARAMETERS

TYPE	JAP6(FA)-60 -250/3BB	JAP6(FA)-60 -255/3BB	JAP6(FA)-60 -260/3BB	JAP6(FA)-60 -265/3BB	JAP6(FA)-60 -270/3BB
Rated Maximum Power at STC (W)	250	255	260	265	270
Open Circuit Voltage (Voc/V)	37.66	37.82	37.98	38.14	38.36
Maximum Power Voltage (Vmp/V)	29.94	30.29	30.63	30.96	31.27
Short Circuit Current (Isc/A)	8.92	8.98	9.04	9.10	9.16
Maximum Power Current (Imp/A)	8.35	8.42	8.49	8.56	8.67
Module Efficiency [%]	15.29	15.59	15.90	16.21	16.51
Power Tolerance (W)	-0~+5W				
Temperature Coefficient of Isc (αIsc)	+0.058%/°C				
Temperature Coefficient of Voc (βVoc)	-0.330%/°C				
Temperature Coefficient of Pmax (γPmp)	-0.410%/°C				
STC	Irradiance 1000W/m ² , Module Temperature 25°C, Air Mass 1.5				

I-V CURVE



NOCT

TYPE	JAP6(FA)-60 -250/3BB	JAP6(FA)-60 -255/3BB	JAP6(FA)-60 -260/3BB	JAP6(FA)-60 -265/3BB	JAP6(FA)-60 -270/3BB
Max Power (Pmax) [W]	181.50	185.13	188.76	192.39	196.02
Open Circuit Voltage (Voc) [V]	34.61	34.68	34.76	34.87	34.98
Max Power Voltage (Vmp) [V]	27.42	27.71	28.05	28.42	28.73
Short Circuit Current (Isc) [A]	7.13	7.18	7.21	7.24	7.28
Max Power Current (Imp) [A]	6.62	6.68	6.73	6.77	6.82
Condition	Under Normal Operating Cell Temperature, Irradiance of 800 W/m ² , spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s				

Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.



50% Installation Time

Harvest the Sunshine
Premium Cells, Premium Modules

Quick and Easy to Install

3 parts for the installation for mounting and grounding reduces installation time

Benefit: Reduce Installation Time

50% LESS



Lower Installation Cost

ZEP module: maximum 50% cut in cost

Benefit: Cut Rooftop Installation Costs

50% LESS



Installation Cost

High Mechanical Load Resistance

5400 Pa
Maximum Static Load, Front
5400Pa (112 lb/ft²)

2400 Pa
Maximum Static Load, Back
2400Pa (50 lb/ft²)

Benefit: High Mechanical Load Resistance



High Reliability

- Long-term reliability tests
- Harsh climate environment endurance tests
- PID-resistance tests
- Certified by TÜV SÜD and ETL
- Industry-leading cell technology
- High quality components from best suppliers
- Manufacturing inspected and certified by PI-Berlin and Solar-IF
- 100% in-house automatic manufacturing
- 2X 100% EL inspection ensuring defect-free



Other Features



Positive power tolerance: 0~+5W



Current binning for better string current matching

Comprehensive Certificates

- IEC 61215, IEC 61730, UL1703, CEC Listed, MCS and CE
- ISO 9001: 2008: Quality management systems
- ISO 14001: 2004: Environmental management systems
- BS OHSAS 18001: 2007: Occupational health and safety management systems
- Environmental policy: The first solar company in China to complete Intertek's carbon footprint evaluation program and receive green leaf mark verification for our products



Specifications subject to technical changes and tests. JA Solar reserves the right of final interpretation.


JA Solar Holdings Co., Ltd.

JA Solar Holdings Co.,Ltd is a world leading manufacturer of high-performance solar power products that convert sunlight into electricity for residential, commercial and utility-scale power generation. The company was founded in May 2005 and publicly listed on NASDAQ in February 2007. JA Solar has been the world's leading cell producer since 2010, and has firmly established itself as a tier 1 module supplier since 2012. Capitalizing on our strength in solar cell technology, we are committed to provide modules with unparalleled conversion efficiency, yield efficiency, and reliability to enable you to maximize your returns on PV projects. With its leading industry experience, continuous effort on R&D, customer-oriented service and sound financial status, JA Solar is your best choice of long-term trustworthy partner.

Add : NO.36, Jiang Chang San Road, Zhabei, Shanghai 200436, China
Tel : +86 21 6095 5888 / +86 21 6095 5999
Fax : +86 21 6095 5858 / +86 21 6095 5959
Email : sales@jasolar.com market@jasolar.com

Superior Warranty

- 10-year product warranty
- 25-year linear power warranty

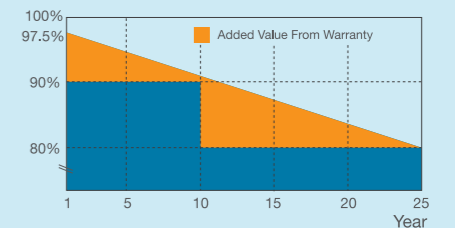

Additional Insurance Options



Partner Section