

VIOLINTM

Crystalline PV Module

CHSM6610P (BL) Series

- ▶ With innovational 4-busbar cells
- ▶ Reducing cell series resistance
- ▶ Increasing cell efficiency
- ▶ All black, especially for the rooftop

250 255 260 265 270

EN

ELECTRICAL SPECIFICATIONS

	250	255	260	265	270
STC rated output (P _{mpp})*	250 Wp	255 Wp	260 Wp	265 Wp	270 Wp
PTC rated output (P _{mpp})**	230.8 Wp	235.5 Wp	240.3 Wp	245.0 Wp	249.7 Wp
Standard sorted output	0/+5 Wp				
Warranted power output STC (P _{nominal})	250 Wp	255 Wp	260 Wp	265 Wp	270 Wp
Rated voltage (V _{mpp}) at STC	30.30 V	30.68 V	31.05 V	31.43 V	31.78 V
Rated current (I _{mpp}) at STC	8.27 A	8.33 A	8.39 A	8.46 A	8.52 A
Open circuit voltage (V _{oc}) at STC	38.19 V	38.40 V	38.53 V	38.72 V	38.91 V
Short circuit current (I _{sc}) at STC	8.65 A	8.69 A	8.72 A	8.75 A	8.79 A
Module efficiency	15.3%	15.6%	15.9%	16.2%	16.5%
Rated output (P _{mpp}) at NOCT	187.5 Wp	191.3 Wp	195.0 Wp	198.8 Wp	202.5 Wp
Rated voltage (V _{mpp}) at NOCT	27.37 V	27.73 V	28.08 V	28.38 V	28.71 V
Rated current (I _{mpp}) at NOCT	6.85 A	6.90 A	6.95 A	7.00 A	7.05 A
Open circuit voltage (V _{oc}) at NOCT	34.89 V	35.08 V	35.20 V	35.37 V	35.55 V
Short circuit current (I _{sc}) at NOCT	7.28 A	7.32 A	7.34 A	7.37 A	7.40 A
Temperature coefficient (P _{mpp})	- 0.407%/K				
Temperature coefficient (I _{sc})	+0.049%/K				
Temperature coefficient (I _{mpp})	- 0.000%/K				
Temperature coefficient (V _{mpp})	- 0.408%/K				
Temperature coefficient (V _{oc})	- 0.310%/K				
Normal operating cell temperature (NOCT)	43±2°C				
Maximum system voltage (IEC/UL)					1000 Vdc
Number of diodes					6 (or 3)
Maximum series fuse rating					15 A

* Measurement tolerance +/- 3%
 ** Estimated



RELATED PARAMETERS

Cell type	polycrystalline
Number of cells / cell arrangement	60 / 6 x 10
Cells dimension	6"
Packing unit	25 modules
Weight of packing unit	508 kg / 1120 lbs


MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1648 x 990 x 40 mm 64.88 x 38.98 x 1.57 in
Frame technology	Aluminum, black anodized
Module composition	Glass / EVA / Backsheet (black)
Weight (module only)	18.4 kg / 40.57 lbs
Front glass thickness	3.2 mm / 0.13 in
Junction box IP rating	IP 65 (above)
* Cable length (UL/IEC)	1000 mm / 39.37 in
Cable diameter (UL/IEC)	12 AWG / 4 mm ²
Maximum load capacity	5400 Pa
Fire performance (UL/IEC)	Type 1 (UL) or Class C (IEC)
Connector type (UL/IEC)	MC4 compatible

* Option: 900(+)/600(-) mm for defined projects in advance.

QUALIFICATION AND LINEAR WARRANTIES

Product standard	IEC 61215, 61730 / UL 1703
Extended product warranty	10 years
Output decline 2.5%/year performance P _{mpp} (STC)	1 st year
Output decline 0.7%/year performance P _{mpp} (STC)	2 nd - 25 th years

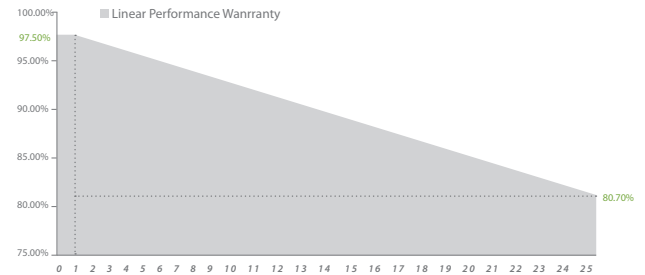

ARTICLE NUMBER

Model	Article No. (IEC)	Article No. (UL)
(VIOLIN) CHSM6610P (BL)-250	200512	200517
(VIOLIN) CHSM6610P (BL)-255	200513	200518
(VIOLIN) CHSM6610P (BL)-260	200514	200519
(VIOLIN) CHSM6610P (BL)-265	200515	200520
(VIOLIN) CHSM6610P (BL)-270	200516	200521

MODULE DIMENSION DETAILS

Front view	Side view	Rear view	Frame cross section

© Chint Solar (Zhejiang) Co., Ltd. Reserves the right of final interpretation.
Specifications and designs included in this datasheet are subject to change without notice.