

AMERICA'S MODULE COMPANY

MSE PERC 60



CERTIFIED RELIABILITY

- › Tested to UL1703 & IEC standards
- › PID resistant



ADVANCED TECHNOLOGY

- › PERC and 5 busbar drive >19.5% module efficiency
- › Ideal for residential & commercial applications



EXTREME WEATHER RESILIENCE

- › 5631Pa front and back load (117 psf) tested load to UL1703




BAA COMPLIANT FOR GOVERNMENT PROJECTS

- › Buy American Act
- › American Recovery & Reinvestment Act



FRAME-TO-FRAME WARRANTY™

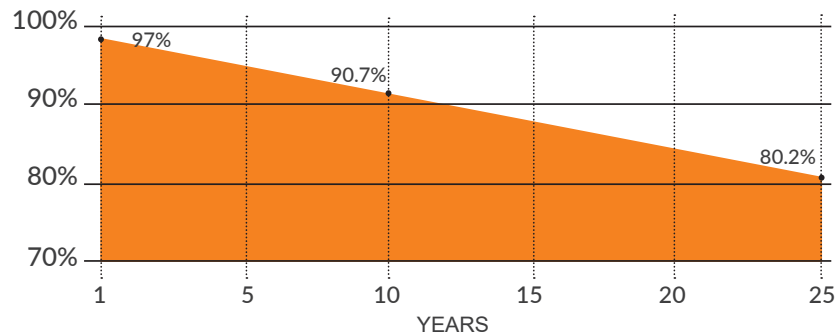

320-330W

CLASS LEADING POWER OUTPUT

19.53%

MAXIMUM EFFICIENCY

-0~+3%

POSITIVE POWER TOLERANCE

CERTIFICATIONS

IEC 61215 - IEC 61730 - IEC 61701 - UL 1703 - Salt mist



CEC



Please contact Mission Solar Energy if you have questions or concerns about certification of our products in your area.

* Standard 12-year product warranty extendable to 25 years with registration:
<https://www.missionsolar.com/warranty/>



MISSION SOLAR
ENERGY

The True American Brand

Mission Solar Energy is headquartered in San Antonio, TX., where we manufacture our modules. We produce American, high quality solar modules ensuring the highest in class power output and best in-class reliability to our customers. Our product line is tailored for residential, commercial and utility applications. Every Mission Solar Energy solar module is certified and surpasses industry standard regulations, proving excellent performance over the long-term. Demand the best, demand Mission Solar Energy.

www.missionsolar.com | info@missionsolar.com

DOCUMENT #: C-SA2-MKTG-0017 REVISION #: R3 REVISION DATE: 4/21/2020

ELECTRICAL SPECIFICATIONS

Electrical Parameters at Standard Test Conditions (STC)

Module Type			MSE320SR8K	MSE325SR8K	MSE330SR8K
Power Output	P _{max}	W _p	320	325	330
Module Efficiency		%	18.94	19.24	19.53
Tolerance			0~+3%	0~+3%	0~+3%
Short-Circuit Current	I _{sc}	A	9.988	10.024	10.045
Open Circuit Voltage	V _{oc}	V	40.38	40.80	41.06
Rated Current	I _{mp}	A	9.435	9.499	9.556
Rated Voltage	V _{mp}	V	33.92	34.21	34.53
Fuse Rating			20	20	20

TEMPERATURE COEFFICIENTS

Normal Operating Cell Temperature (NOCT)	46.43°C (±2°C)
Temperature Coefficient of P _{max}	-0.375% / °C
Temperature Coefficient of V _{oc}	-0.280% / °C
Temperature Coefficient of I _{sc}	0.045% / °C

OPERATING CONDITIONS

Maximum System Voltage	1,000Vdc
Operating Temperature Range	-40°C (-40°F) to +85°C (185°F)
Maximum Series Fuse Rating	20A
Fire Safety Classification	Type 1, Class C
Front & Back Load (UL standard)	5631Pa (117 psf) Tested to UL1703 standard
Hail Safety Impact Velocity	25mm at 23 m/s

MECHANICAL DATA

Solar Cells	P-type mono-crystalline silicon (158.75mm)
Cell Orientation	60 cells (6x10), 5 busbar
Module Dimension	1676mm x 1008mm x 40mm (65.98 in. x 39.68 in. x 1.58 in.)
Weight	20 kg (44 lb)
Front Glass	3.2mm (0.126 in.) tempered, low-iron, anti-reflective coating
Frame	Anodized aluminum alloy
Encapsulant	Ethylene vinyl acetate (EVA)
J-Box	Protection class IP67 with 3 bypass-diodes
Cables	PV wire, 1m (39.37 in.), 4mm ² / 12 AWG
Connector	MC4 Compatible

SHIPPING INFORMATION

Container FT		Pallets	Panels	325 W		
53'	Double stack	36	936	304.20 kW		
40'	Double stack	28	728	236.60 kW		
Pallet		Panels	Weight	Height	Width	Length
		26	1,198lbs	42.45"	45.50"	67.00"

CERTIFICATIONS & TESTS

IEC


61215 - 61730 - 61701 - Salt mist

UL

UL 1703 listed



MSE325SR8K: 325WP, 60 CELL SOLAR MODULE CURRENT - VOLTAGE CURVE

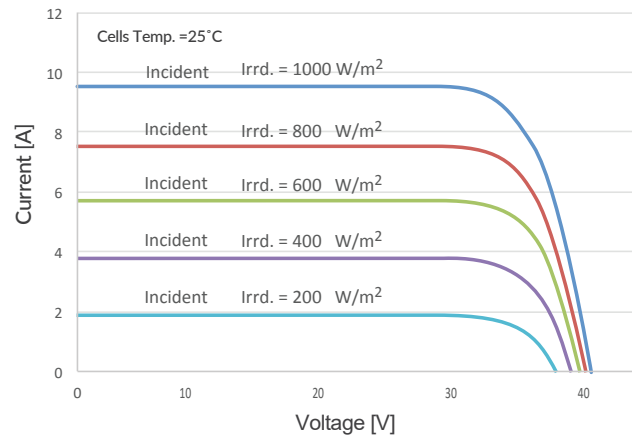

Current-voltage characteristics with dependence on irradiance and module temperature

BASIC DESIGN (UNITS: mm)

