

IGNITE THE POWER OF NATURE

Monocrystalline Module --small size 100Watt

Model (SL100TU-18MD) Specifications





Low Carbon Emission Excellent Weath Resistance

Electrical Data		
Maximum Power(W)	100W	
Optimum Power Voltage(Vmp)	18.78V	
Optimum Operating Current(Imp)	5.32A	
Open Circuit Voltage(Voc)	22.64V	
Short Circuit Current(Isc)	5.70A	
Cell Efficiency (%)	17.88%	
Module Efficiency (%)	14.90%	
Tolerance Wattage(e.g.+/-3%)	0 ~+3%	
NOCT	47°C +/-2°C	

Benefits

¤ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;

Bypass diode minimizes the power drop caused by shade;

^{III} Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;

Modules independently tested to ensure conformance with certification and regulatory standards;

Manufacturing facility certified to ISO 9001 quality management system standards.

Applications

On-grid residential roof-tops

- © On-grid commercial/industrial roof-tops
- [¤] Solar power stations
- ¤ Other on-grid applications

Temperature Coefficients

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.38
Temperature Coefficients of Pm(%)	-0.47
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.38






IGNITE THE POWER OF NATURE

Monocrystalline Module --small size 100Watt

Components & Mechanical

Solar Cell	156*104 Mono	
Number of Cell(pcs)	4*9	
Size of Module(mm)	1005*668*35	
Front Glass Thikness(mm)	3.2	
Surface Maximum Load Capacity	2400-5400Pa	
Allowable Hail Load	23m/s ,7.53g	
Weight Per Piece(KG)	8.0	
Bypass Diode Rating(A)	10	
Frame(Material Corners, etc.)	35#	
Backing (Brand Type)	ТРТ	
Temperature Range	-40°C to +85°C	
FF (%)	70-76%	
Standard Test Conditions	AM1.5 1000W/m ² 25°C	

Engineering Drawings

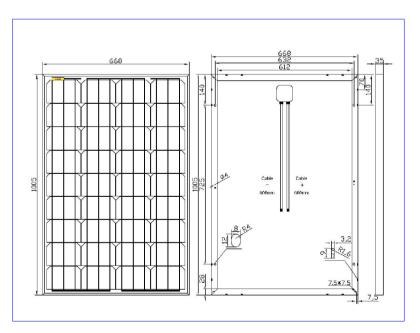

Packing

Packing	Wooden Box
Pieces per	30pcs/Pallets
container	

Project Picture



Ningbo Qixin Solar Electrical Appliance Co., Ltd ADD: No. 37 Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China TEL: 0086 (0)574 25758821 FAX: 0086 (0)574 25758820 E-mail: info@nbqxsolar.com

©2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

