

IGNITE THE POWER OF NATURE

Polycrystalline Module --small size 120Watt

Model (SL120TU-18P) Specifications





Low Carbon Emission Excellent Weather Resistance

Electrical Data		
Maximum Power(W)	120W	
Optimum Power Voltage(Vmp)	18.83V	
Optimum Operating Current(Imp)	6.37A	
Open Circuit Voltage(Voc)	22.46V	
Short Circuit Current(Isc)	6.82A	
Cell Efficiency (%)	16.90%	
Module Efficiency (%)	14.60%	
Tolerance Wattage(e.g.+/-3%)	0 ~+3%	
NOCT	47°C +/-2°C	

Benefits

^a High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;

Bypass diode minimizes the power drop caused by shade;

^{III} Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;

Modules independently tested to ensure conformance with certification and regulatory standards;

Manufacturing facility certified to ISO 9001 quality management system standards.

Applications

Temperature Coefficients

- ¤ On-grid residential roof-tops
- ¤ On-grid commercial/industrial roof-tops
- Solar power stations
- ¤ Other on-grid applications

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.38
Temperature Coefficients of Pm(%)	-0.47
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.38








IGNITE THE POWER OF NATURE

Polycrystalline Module --small size 120Watt

Components & Mechanical

Solar Cell	156*129 Poly
Number of Cell(pcs)	4*9
Size of Module(mm)	1230*668*35
Front Glass Thikness(mm)	3.2
Surface Maximum Load Capacity	2400-5400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	9.7
Bypass Diode Rating(A)	10
Frame(Material Corners, etc.)	35#
Backing (Brand Type)	ТРТ
Temperature Range	-40°C to +85°C
FF (%)	70-76%
Standard Test Conditions	AM1.5 1000W/m ² 25°C

Engineering Drawings

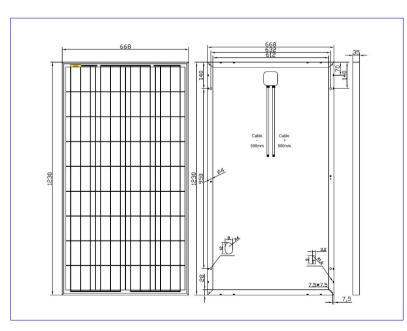

Packing

Packing	Wooden Box
Pieces per	30pcs/Pallets
container	

Project Picture



Ningbo Qixin Solar Electrical Appliance Co., Ltd ADD: No. 37 Jingang Road, Binhai Industrial Park, Xiangshan County, Ningbo, 315700, China TEL: 0086 (0)574 25758821 FAX: 0086 (0)574 25758820 E-mail: info@nbqxsolar.com

©2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

